

MAKU SINK MIXER INSTALLATION GUIDE

TECHNICAL SPECIFICATIONS

Operating Pressure:

Min 35kPa, Max 1000kPa.

Recommended 35kPa - 500kPa.

Recommended installation of a pressure limiting valve if supply exceeds 500kPa.

Operating Temperature:

Hot: Max 70°C.


Cold: Min 5°C.

NB: New Zealand Building Code Clause G12 - Water Supplies specifies all outlets used primarily for personal hygiene shall deliver water at a safe temperature.

Inlet Connections:

All ½" BSP.

This product complies with the Lead Free requirements of the National Construction Code Volume Three.

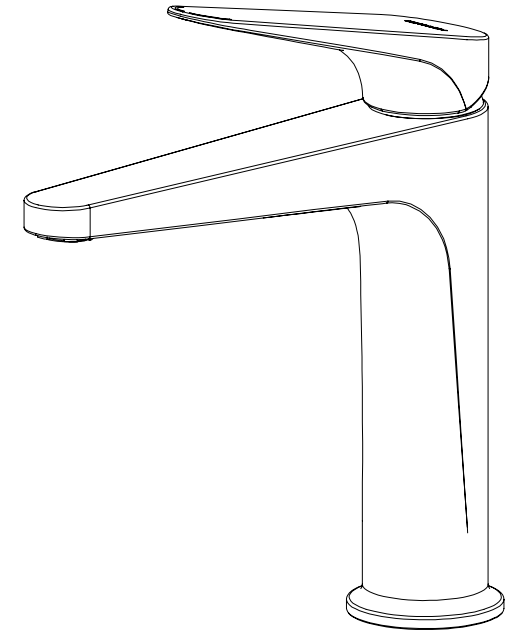

Methven warrants this product against manufacturing defects and that it is suitable for use under the operating conditions specified in this instruction sheet.

For your warranty please refer to www.methven.com or call Customer Service

New Zealand
0800 804 222


Australia
13 14 16

IMPORTANT

Please read all of the instructions before installation

This mixer is designed for equal and unequal pressure systems.

All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles damaging the ceramic cartridge.

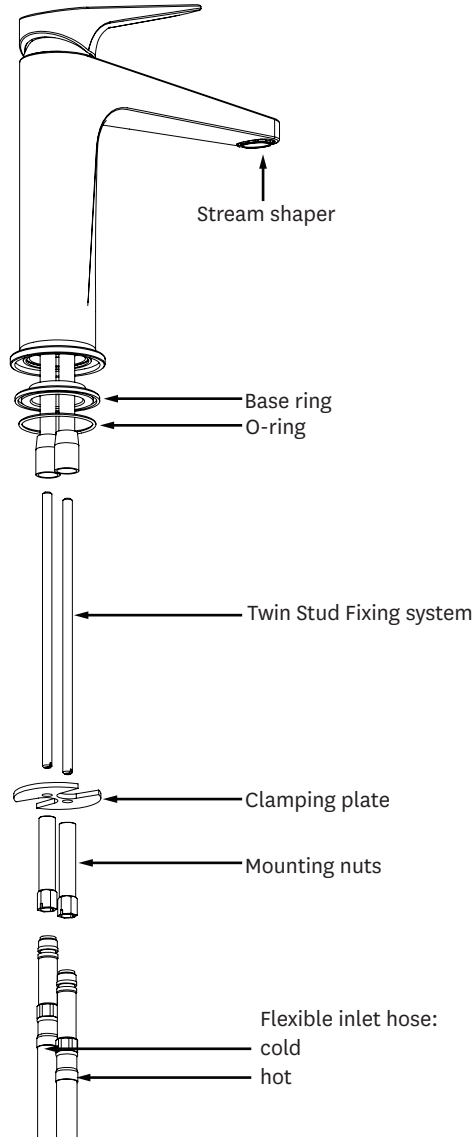

Equal Low Pressure and Unequal Pressure Installations

Remove flow restricted (yellow) stream shaper using cache key. Replace with un-restricted (white) Slim HC stream straightner.

IMPORTANT:

It is the responsibility of the installer to ensure a waterproof seal is achieved between the product and mounting surface.

It is crucial to ensure that a tap is properly sealed to a work surface to prevent leaks and water damage. Failure to do so can result in water leakage, potential damage to the work surface, and other related issues. It is recommended to follow the manufacturer's instructions and use an appropriate sealant to ensure a secure and watertight seal between the tap and the work surface. If you are unsure about the installation process, it is advisable to seek professional assistance to avoid any potential issues.

TIP - Install product on bench before connecting second hose to mixer.

