

Pop Up Waste Installation Guide

Technical Specifications:

Operating Temperature:

Hot : Max 80°C.

Cold: Min 5°C


Mounting surface thickness:

Max 60mm

Connection:

32mm / 1³/₄"BSP

*Regional specific regulations apply.
Please refer to your warranty statement
at www.methven.com*

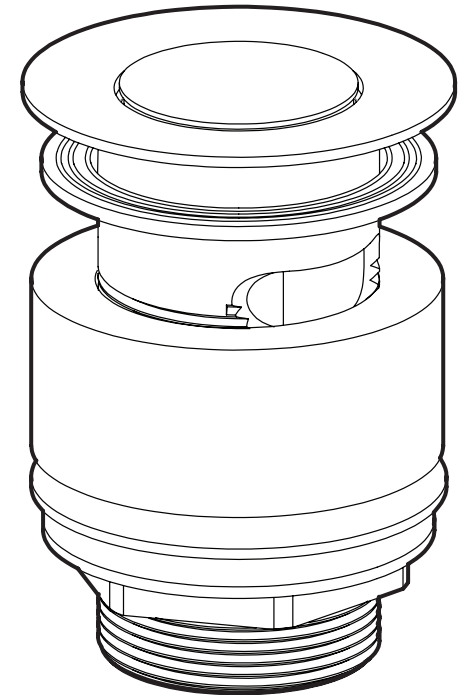

Methven warrants this product against manufacturing defects and that it is suitable for use under the general operating conditions specified in this instruction sheet. However, regional regulations apply and may affect your warranty. Please refer to www.methven.com or call customer service for full details.

New Zealand
0800 804 222

Australia
13 14 16

UK
0800 195 1602

439939

ISSUE C

METHVEN
www.methven.com


IMPORTANT: Please read all of the instructions before installation.

General:

- Methven recommends this product is installed by a licensed plumber in compliance with all relevant regional regulations.

After installation all connections must be checked for leaks.

- It is the responsibility of the installer to ensure a waterproof seal is achieved between the product and mounting surface. If in doubt about the quality of the seal, remove the product and reinstall using silicone to ensure a seal is achieved.

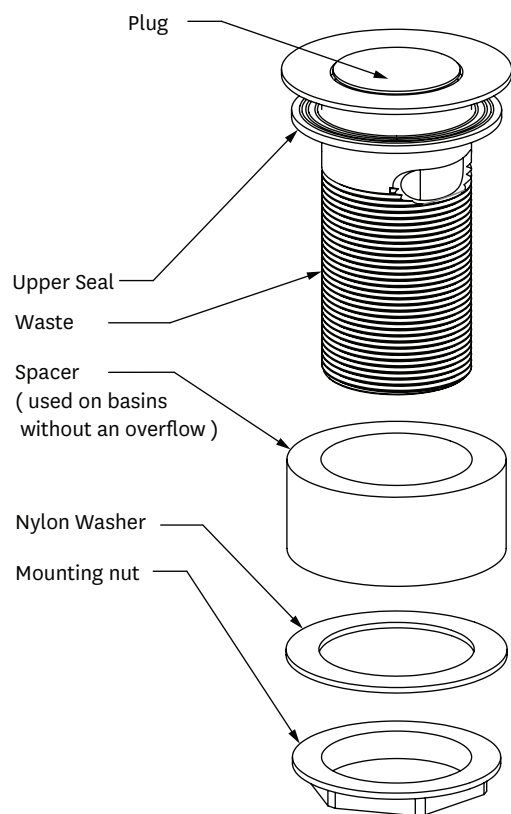

Installation:

1. A single 45mm hole to suit a 32mm / G1¼" waste pipe is required in the mounting surface.
2. Apply sealant to the underside of the upper seal.
3. Insert the waste thorough the hole in the basin.
4. If the basin has an overflow, the spacer may be discarded. Proceed to step 7.
5. Apply sealant to the upper surface of the spacer.
6. Slide the spacer over the thread underneath the basin.
7. Apply sealant to the upper side of the nylon washer.
8. Slide the washer over the thread and apply sealant to the waste thread adjacent to the washer.
9. Screw the mounting nut onto the waste thread and tighten.
10. Connect the drain pipe (not supplied) and check for leaks.

Care and Cleaning:

- Never use abrasives or abrasive cleaning agents to clean this product. Clean regularly with contamination free warm soapy water and a damp soft cloth.
- The plug may be unscrewed counter-clockwise to facilitate cleaning.