

Caroma®


Flex

**4.5/3 litre Dual Flush Toilet Suite with
Flex Wall Faced Box Rim Vitreous China Pan
and Invisi II Cistern for Inwall, Induct or
Inceiling applications**

CI/SfB	(74.1)	g3
Date	October 2015	

Supersedes all previous issues

3.47.1



Caroma®

Flex Invisi II

4.5/3 litre Dual Flush Toilet Suite with Flex Vitreous China Wall Faced Box Rim Pan and Invisi II Cistern for Inwall, Induct or Inceiling applications.



Flex Invisi II toilet suite is suitable for inwall, induct, and in ceiling applications. This pan is designed specifically for commercial retrofit applications. The pan features a unique flexible inlet and outlet connection system, offering a retrofit for existing wall hung and wall faced pans installed without replacing drain lines. The wall faced foot print covers many existing wall hung pans reducing the need for re-tiling. Concealed cistern and plumbing fittings provide space saving, ease of cleaning and performance matched components to maximise flushing efficiency. The suite is suitable for domestic and commercial applications.

Pan: **Flex** 4.5 litre full flush box rim pan.

Traps: Flexible set out P trap installation.

Cisterns: **Invisi II** cistern – suitable for inwall, induct and in ceiling applications. *For push button and access plate (supplied separately) options see chapter 6.15.1 CISTERNS of the Caroma Technical Manual.*

Fixing: The pan can be fixed to the floor by either bedding into mortar or using the D82 Concealed Fixing Bracket.

The cistern is simply mounted into position by clipping onto the two quick clip mounting brackets which are secured with screws to the studwork or induct brickwork. Cistern brackets and flush pipe supplied.

Seats: Includes **Pressalit** seat.

Colours: White only.

Installation: The installation of the toilet suite shall be in accordance with the normal minimum drainline grade requirements in AS/NZS 3500.2.


Dimensions: All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

Flex Invisi II 4.5/3 Toilet Suite with Back Inlet Pan, Internal Overflow Cistern and Seat: Code No.

Inwall/Under Counter/ Induct/Inceiling	710100
Button options: see 6.15.1	

Existing flushpipe	Suitable flexible inlet connector
40mm copper	687057 (supplied)
50mm copper/2" flush pipe	687058 (supplied)
40mm PVC	687055
50mm PVC	687056
100mm copper & PVC outlet pipe	687060 (supplied)

Flexible connectors and connector bracket

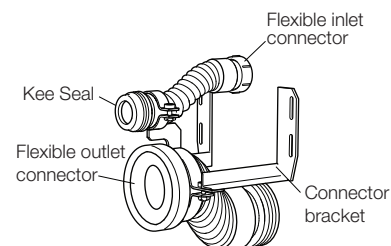

Note: All height dimensions to underside of pan, make allowance for bedding.

Bedding: The pan should be fixed to the floor with a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast drying cement in the bedding mixture. When bedded the back of the foot of the pan should be approximately 10mm above the finished floor.

Bracket fixing: The pan should be bedded with an acetic cured silicone sealant and fixed with the D82 Fixing Brackets supplied.

