

# CAROMA SCHOOL SMART BIB HOB MOUNTED TAP

## PLUMBERS INSTALLATION INSTRUCTIONS

### Important Information

- \* Not suitable for gravity feed systems.
- \* Body (1) is fitted with a flow regulator. This low flow rate may not be suitable for connection to some Instantaneous Gas Water Heaters, some Tempering Valves, some Solar Water Heaters & some Thermostatic Mixing Valves. Check with the manufacturers of these products. The flow regulator can be accessed as shown (Fig.1).
- \* All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.

### Installation

- 1) Hob lining hole should be cut or finished as per the dimensions shown (Fig.2).
- 2) Fit 'O'ring (2) into groove of tap body (1) as shown (Fig.3).
- 3) Place threaded tail of tap body into deck hole, slide basin spacer (3) and tighten backnut (4) on threaded tail until outlet is clamped firmly to the deck (Fig.3).

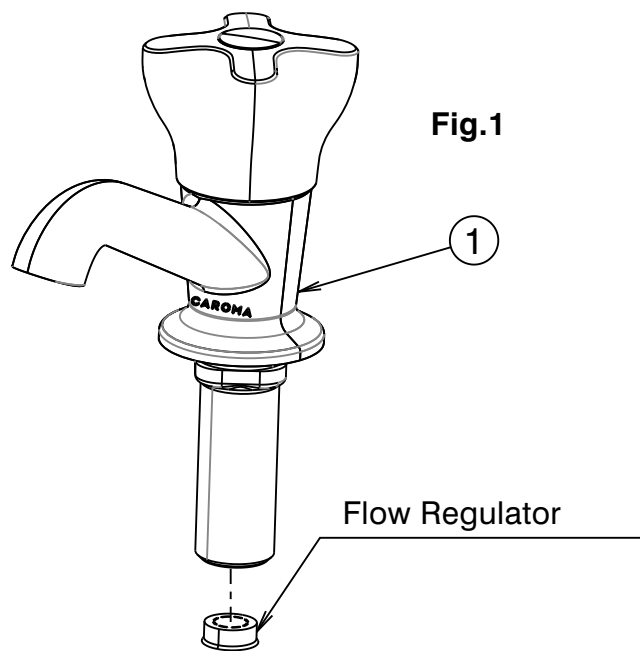


Fig.1

- 4) Install water inlet hose (not supplied) and check for leaks.
- 5) Ensure that the tap is oriented with the spout pointing downwards.

### Inlet Connection:

1/2" BSP

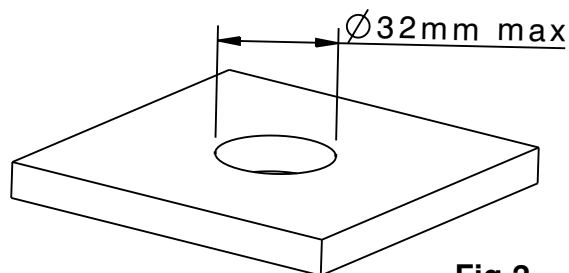


Fig.2

| IMPORTANT                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Pressure &amp; Temperature Requirements</b>                                                                                                                                                                                                                                                                                                                      |
| <ul style="list-style-type: none"><li>• Static inlet pressure range : 150-1000 kPa New Regulation:- 500 kPa maximum static pressure at any outlet within a building. (Ref. AS/NZS 3500.1)</li><li>• Water temperature range: 5 °C - 80°C.</li><li>• This product complies with the Lead-Free requirements of the National Construction Code Volume Three.</li></ul> |

