

CAROMA COMMERCIAL WALL MOUNTED BUBBLER SIDE ACTIVATION

WATER EFFICIENT TAPWARE

PLUMBERS INSTALLATION INSTRUCTIONS

Important Information

- * Not suitable for gravity feed systems.
- * Bubbler (4) is fitted with a flow regulated 4.0L/min check valve (2).
This low flow rate may not be suitable for connection to some Instantaneous Gas Water Heaters, some Tempering Valves, some Solar Water Heaters & some Thermostatic Mixing Valves. Check with the manufacturers of these products.
Note: Warranty is void if regulated check valve (2) is not installed in correct direction as shown.
- * All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.
- * Once the bubbler has been installed and tested for leaks, the water height must be adjusted to suit the available pressure, (See "Adjusting Water Height").

Installation

- 1) Check that threaded nipple (1) is the correct length, as shown. Cut to length if required ensuring end face is square. Apply thread tape to the thread.
Important: Care must be taken that thread tape cannot become dislodged and block the flow regulating device, causing a reduction in water flow.
- 2) Ensure the 'O' Ring (3) is fitted to the groove in the base of bubbler (2), as shown. Screw the bubbler assembly (4) onto the threaded nipple (1) until its base is adjacent to the wall surface and the outlet hole is pointing up. DO NOT OVERTIGHTEN.

Adjusting Water Height

Water height can be adjusted by turning adjustable screw (5) 1/4 turn maximum with a flathead screwdriver.

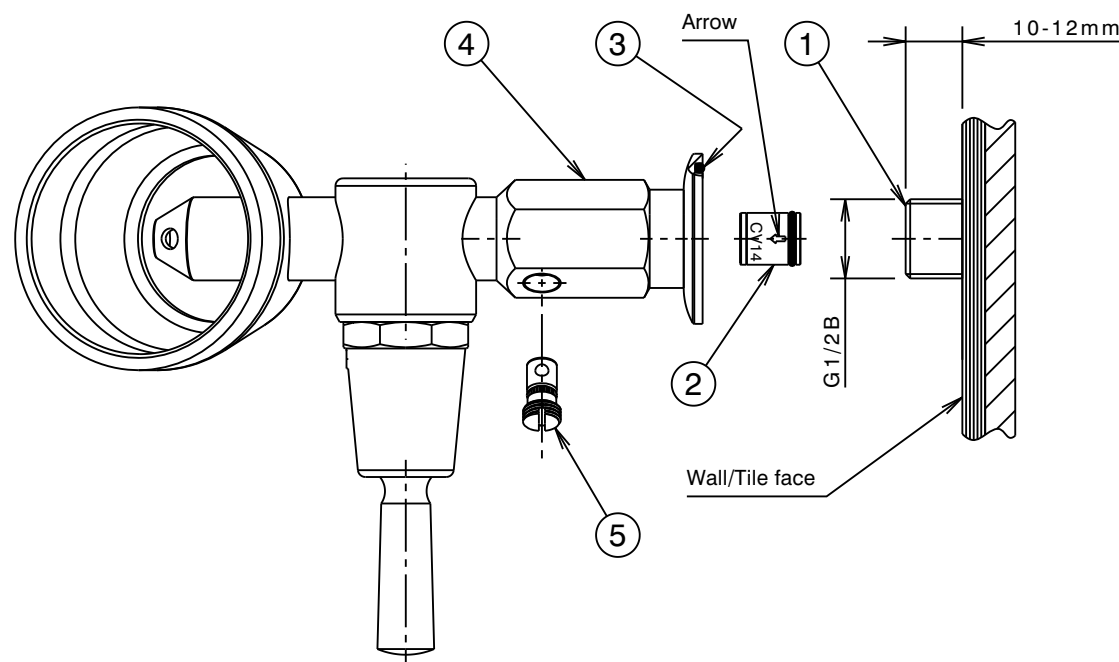


Fig.1

IMPORTANT

- This product complies with the Lead Free requirements of the National Construction Code Volume Three.
- Static inlet pressure range : 150 -1000 kPa
New Regulation :-500 kPa maximum static pressure at any outlet within a building. (Ref. AS/NZS 3500.1)
- Maximum hot water temperature : 50°C.

Installation Requirements.

- The installing plumber is responsible for waterproofing all penetrations for Taps in Shower areas at installation by a proprietary flange system or a sealant. (Ref AS3740)