

CIVIC HOB PUSH BOTTLE FILLER WATER EFFICIENT TAPWARE

PLUMBERS INSTALLATION INSTRUCTIONS

Important Information

- ❖ Not suitable for gravity feed systems.
 - ❖ Bottle filler (10) is fitted with a flow regulated 4.5L/min aerator. This low flow rate may not be suitable for connection to some Instantaneous Gas Water Heaters, some Tempering Valves, some Solar Water Heaters & some Thermostatic Mixing Valves. Check with the manufacturers of these products.
 - ❖ An isolating stop tap must be fitted to the water supply connection hose. (Part No. 842018C - Mini cistern 1/4T).
 - ❖ All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.
- Note: Aerator insert must be retightened to prevent removal by hand.

Installation

- 1) From fixing pack fit 'O'ring (1) into groove in base ring (2). Slide the base ring over the threaded tube (3) & locate spigot of base ring (2) into base of bottle filler body (10), as shown.
 - 2) Insert the inlet connection end (5) of flexible hose (4) through the hole in the deck. Fit bottle filler (10) into deck hole, fit washer (7) together with flat seal (6) over threaded tube (3) of bottle filler as shown (Fig.1). Screw clamp ring (8) onto threaded tube until it contacts washer (7) & the flat seal (6) has contacted the underside of the deck. Tighten two screws (9) using a 3mm allen key until mixer assembly is clamped firmly to the deck.
- DO NOT OVERTIGHTEN.**
- 3) Connect the flexible hose (4) to the isolating stop tap hand tighten the fixing nut (5) until rubber cone contacts the sealing face of the connection end, then tighten a further one turn to provide a watertight joint.
- Important: Flexible hose must not be kinked, twisted or in tension when installed. (Minimum Bend Radius:- 50mm) Do not install flexible hose where subject to ultra violet light.

IMPORTANT	
• This product complies with the Lead Free requirements of the National Construction Code Volume Three.	
• Static inlet pressure range : 150 - 500 kPa New regulation:- 500kPa maximum static pressure at any outlet within a building. (Ref AS/NZS 3500.1)	
• Maximum hot water temperature : 50 °C	
Deck Requirements	
• Deck thickness : 45mm maximum	
• Tap body hole (in deck) : Ø34 - 36mm	

IMPORTANT:

Install this bottle filler on a solid surface. Installation on an unsupported stainless steel surface is not recommended and may result in movement during use.

It is the responsibility of the installer to ensure a waterproof seal is achieved between the product and mounting surface. It is crucial to ensure that a tap is properly sealed to a wall/ tile surface to prevent leaks and water damage. Failure to do so can result in water leakage, potential damage to the wall surface, and other related issues. It is recommended to follow the manufacturer's instructions and use an appropriate sealant to ensure a secure and watertight seal between the tap and the work surface.

If you are unsure about the installation process, it is advisable to seek professional assistance to avoid any potential issues.

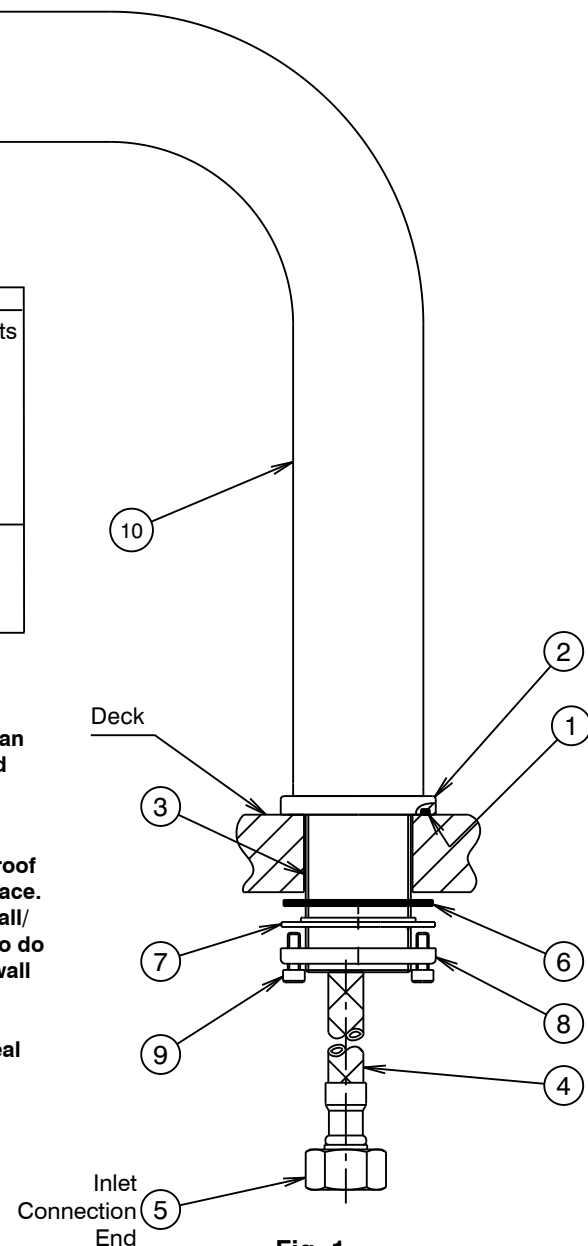


Fig. 1