Date 07/04/2025

## Care 705 Invisi Series II<sup>®</sup> Cleanflush™

## Sanitary Facilities - Access and Mobility

## 4.5/3 litre Dual Flush Toilet Suite with Wall Faced Pan and Invisi Series II® Cistern





The 4.5/3 dual flush Care 705 Invisi Series II® Cleanflush™ suite is designed to provide a raised seat height of between 460-480mm for accessible applications &. With a pan projection of 705mm ±10mm, compliance to NZS 4121.1 for wheelchair access can be easily achieved. Concealed cistern and plumbing fittings provides ease of cleaning, high infection control and performance matched components to maximise flushing efficiency. The pan connection system includes the patented Caroma Uni-Orbital® connector that extends to any position in a 50mm radius, unlike traditional connectors that only move backwards and forwards.

Featuring rimless pan technology, the Care 705 Cleanflush™ is a superior flushing system suitable for commercial and domestic applications. Incorporating several patented technologies, the Caroma Flow Splitter™ evenly flows water around the top of the bowl to meet at the Caroma Flow Balancer™ which directs the water powerfully into the sump. The Caroma Cleanflush™ pan is easy to clean, provides full visibility of any grime build up and provides a cleaner clean with every flush for peace of mind

The adjustable flush pipe is a new feature for the Invisi II system. If the pan inlet hole is higher than the flush pipe due to floor tiling height variations, the flush pipe can be raised by up to 25mm.

Further reference must be made to NZS 4121.1 with current amendments to determine

circulation space, grab rail and installation requirements. The dimensions in this sheet may change with amendments to the standard.

Pan: Care 705 Cleanflush™ 4.5 litre full flush wash down rimless type.

Traps: Universal trap.

50mm back inlet. A 40mm Key seal is available. Inlet:

Cisterns: Invisi Series II® cistern - suitable for inwall, induct and inceiling applications

Important: Working pressure minimum 30kPa to maximum 1000kPa flow pressure. Rain

water tank compliant.

**Buttons:** Sold separately: See Section 16 - CARE BUTTONS for further details.

**Product Description** 

Caravelle Seat (GermGard®)

Caravelle Care seat supplied in single flap or double flap, available in Caroma White (W). Seats: Position of For wheel chair access the installed pan must be 700 to 750mm from the front of the pan to the the Pan: finished wall and provide a seat height of 460 to 480mm.

Position of The pan is suitable for installation with concealed cisterns providing the circulation space the Cistern:

requirement is maintained. The height of the push button must be no greater than 1100mm to the top of the push button and positioned within the push button zone or on the centre line of the

Code No.

03221003W

Colour

Backrest: White

Seat: White

Colour: White only

The installation of the toilet suite shall be in accordance with the normal minimum drainline grade Installation: requirements in AS/NZS 3500.2.

480


**Dimensions:** All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

Care 705 Invisi Series II® Cleanflush

Toilet Suite with Backrest and Double Flap








All height dimensions to underside of pan, make allowance for mortar bedding.

Mortar bedding: The pan should be fixed to the floor with a sand cement mixture of 3:1 to a depth of 60mm. When bedded the back of the foot of the pan should be approximately 10mm above the finished floor

Screw fixing: The pan should be bedded with an acetic cured silicone sealant and fixed with corrosion resistant Code No.601150

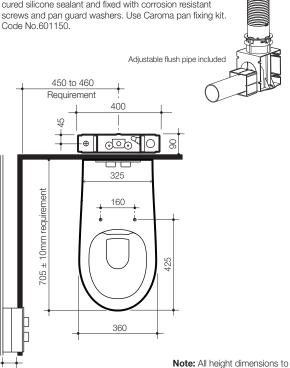

Care 705 Invisi Series II® Cleanflush® Toilet Suite with Backrest and Single Flap Backrest: White 03221004W Caravelle Seat (GermGard®) Seat: White Care 705 Cleanflush Wall Faced Pan (GermGard®) 03221002W White Care Support Backrest Curved Arm (GermGard®) 08221001SW White Care Support Backrest Foam Pad 08221011W White To increase cistern height use elevated flush pipe kit (not supplied) Care buttons  $\Theta$ Invisi Series II<sup>®</sup> cistern to top of flush pipe support noggin 300 – 1100 requiremen 984 (adjustable from 884 top of to 430

185

'0mm min. for button

and remote mounting box

underside of pan, make allowance

for mortar bedding.