

Liano Cleanflush™ Easy Height Invisi II®

Sanitary Compartment - Ambulant Applications
4.5/3 litre Dual Flush Toilet Suite with
Wall Faced Pan and Invisi Series II® Cistern



cleanflush

A sharp, symmetrical designed wall faced easy height concealed toilet suite comprises the **Liano Cleanflush™ Easy Height** pan and trusted Caroma **Invisi II** cistern. The suite is targeted for use in commercial applications where a pan height of 435mm is required for ambulant compliance, but it is also suitable for domestic applications. The pan connection system includes the patented Caroma Uni-Orbita® Connector extends to any position in a 50mm radius, unlike traditional connectors that only move backwards and forwards. The setout range is from 60mm – 165mm with a recommended setout of 90mm. The smooth sided pan is available in both standard and easy height models and with the great looking thin lid, soft close seat with quick release. Choose from a variety of buttons from the Caroma range to complete your desired look.

Featuring rimless pan technology, the **Liano Cleanflush™ Easy Height Invisi II®** is a superior flushing system suitable for commercial and domestic applications. Incorporating several patented technologies, the Caroma Flow Splitter™ evenly flows water around the top of the bowl to meet at the Caroma Flow Balancer™ which directs the water powerfully into the sump. The Caroma Cleanflush™ pan is easy to clean, provides full visibility of any grime build up and provides a cleaner clean with every flush for peace of mind.

Important : Reference must be made to AS 1428.1-2009 with current amendments to determine circulation space, grab rail and installation requirements. The dimensions in this sheet may change with amendments to the standard.

Pan: Liano Cleanflush™ Easy Height back inlet 4.5 litre full flush rimless pan.

Traps: Universal trap for S or P-trap installations.

Inlet: 50mm back inlet for concealed cistern and flushvalve installation.

Cisterns: **Invisi Series II®** cistern – suitable for inwall, induct and in ceiling applications.

Important: Working pressure minimum 30kPa to maximum 1000kPa flow pressure.
Rain water tank compliant.

Buttons: Sold separately: See Section 4 - CARE BUTTONS for further details.

Seats: The **Liano Care** single flap soft close quick release thermoset toilet seat or **Liano** double flap soft close thermoset quick release toilet seat, available in Caroma White (W), Sorrento Blue (SB) and Anthracite Grey (AG), is provided as standard with the Liano suite. A quality solid section compression moulded toilet seat, fitted with buffers and metal hinges. See Section 3 - SEATS for further details.


Colour: White only.

Installation: The installation of the toilet suite shall be in accordance with the normal minimum drainline grade requirements in AS/NZS 3500.2.

Dimensions: All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

Note: The projection requirements detailed on this illustration are for wheel chair access only.

* Reference must be made to the AS 1428.1-2009 Amd 1 to confirm installation requirements.

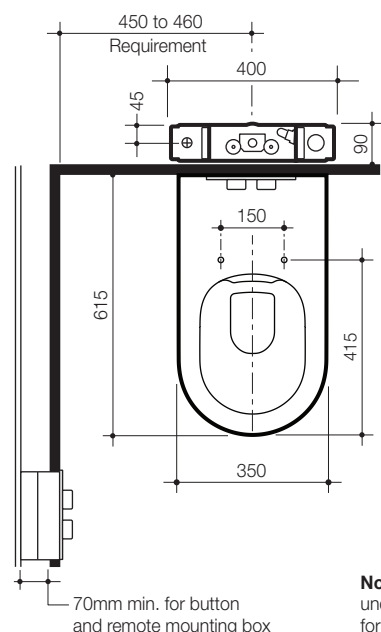

Note: All height dimensions to underside of pan, make allowance for mortar bedding.

Liano Cleanflush Easy Height Invisi II
4.5/3 litre Toilet Suite with Back Inlet Pan,
Internal Overflow Cistern and Seat: **Code No.** **Seat Colour:**

Inwall/Under Counter/Induct/Inceiling with Liano Care Single Flap Soft Close Seat	766300	W, SB or AG
Inwall/Under Counter/Induct/Inceiling with Liano Double Flap Soft Close Seat	766350	W, SB or AG
Button options: see 6.15.1		

