


METHVEN


MAKU




MAKU MK2 SHOWER MIXER WITH FASTFLOW 2





CHROME



BRUSHED
NICKEL



GUNMETAL

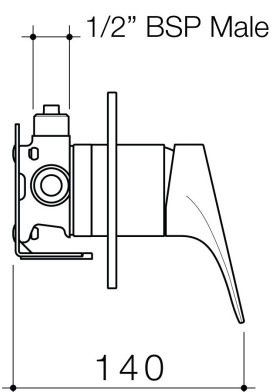

CONSTRUCTION: Low-lead brass body

CARTRIDGE: Cermaic with Fastflow II technology

CLASSIFICATION: Suitable for all pressure systems above 17kPa

INLET CONNECTIONS: 1/2" BSP Male

OUTLET CONNECTIONS: 1/2" BSP Male

WORKING PRESSURES: Unequal Hot min 17 kpa. Unequal Cold min 300kpa

DIMENSIONS FOR FITTING: 80mm diameter hole for mixer waterproofing cup

OPTIMUM PRESSURE: 35 - 500kpa

OPERATING TEMPERATURE: 5 °C -70 °C

- Universal in-wall body with Methven Fastflow II technology
- Engineered from lead free brass
- Interchangeable trim kits allow colour or finish to be changed post installation
- 120mm diameter metal faceplate with positive seal between faceplate and the body
- Precise temperature transition from cold to hot minimises the risk of scalding

MAAPS2CPF

Chrome

MAAPS2BNF

Brushed Nickel

MAAPS2GMF

Gunmetal

THE METHVEN GUARANTEE. For total peace of mind, all domestic tapware products include a 20 Year Parts and Labour Guarantee. For commercial installations, a 5 Year Guarantee on Parts and Labour applies. For full terms and conditions, visit www.methven.com.