

Origin BTW CC Cistern

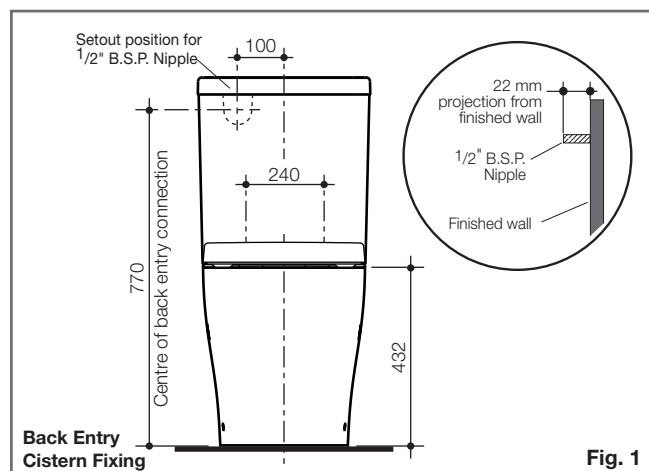


Fig. 1

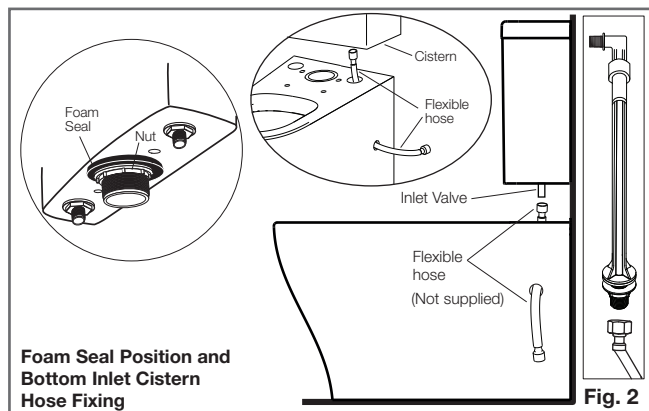


Fig. 2

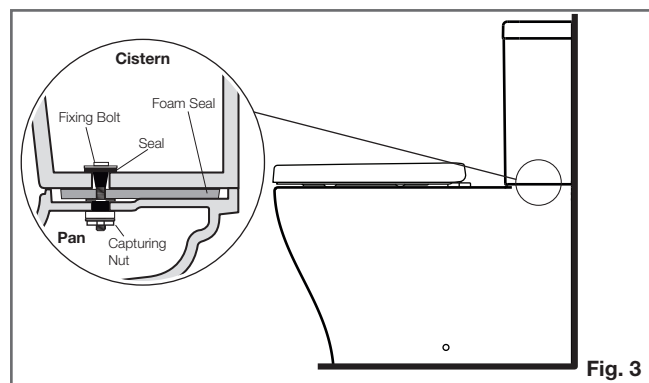


Fig. 3

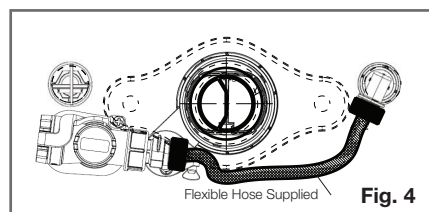


Fig. 4

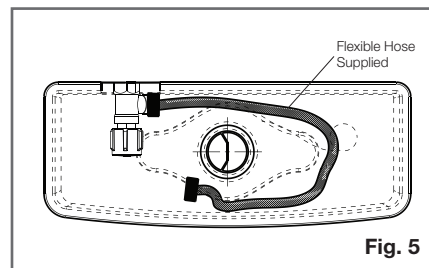


Fig. 5

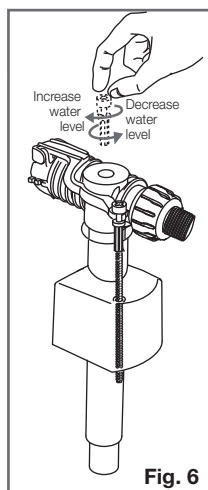


Fig. 6

PLUMBER'S INSTALLATION INSTRUCTIONS

**PLEASE READ CAREFULLY BEFORE INSTALLATION
THESE CISTERN INSTRUCTIONS SUPERSEDE
INSTRUCTIONS IN THE PAN CARTON**

CLOSE COUPLED CISTERN FIXING PROCEDURE

Standard Right Hand Bottom Inlet

Note: The inlet valve can be changed from right to left.

The cistern fixes directly to the pan with a robust base fixing system without the need for wall fixing.

- 1- Securely attach Foam Seal around the outlet on the base of cistern, as detailed in **Fig. 2**. Remove outlet valve to gain access to the cistern fixing holes.
- 2- Connect external flexible hose (Not supplied) to Inlet adaptor bottom end and thread other end of flexible hose through side hole on pan, as detailed in **Fig. 2**. Position cistern onto pan and align the cistern fixing holes with pre-fitted capturing nuts located on the cistern platform. Inset & tighten fixing bolts with a screwdriver to secure the cistern to the pan, as detailed in **Fig. 3**.
- 3- Connect Inlet adaptor top end and BE Inlet valve with supplied flexible hose as detailed in **Fig. 4**.
Note: As specified in Australian Standard AS/NZS 3499, flexible hose assemblies shall not be submerged.
- 4- Refit the outlet valve into position.
- 5- Flush the lines and connect water supply and check operation of cistern.
- 6- Turn on water mains. Open the Cistern Stop Valve and check the operation of the mechanisms and valve. Adjust water level to the water level mark inside the cistern by simply turning the float arm adjustment screw in a clockwise or anti clockwise direction as detailed in **Fig. 6**.
- 7- Fit lid to check push button operation to complete installation.

Back Entry Installation

- 1- Securely attach Foam Seal around the outlet on the base of cistern, as detailed in **Fig. 2**. Remove outlet valve to gain access to the cistern fixing holes.
- 2- Position cistern onto pan and align the cistern fixing holes with pre-fitted capturing nuts fixing holes located in the cistern platform. While lowering cistern onto pan, angle the top of the cistern away from the wall until the cut-out clears the connection nipple in the wall.
- 3- Inset & tighten fixing bolts with a screwdriver to secure the cistern to pan, as detailed in **Fig. 3**.
- 4- Fit Cistern Stop Valve (Not supplied) to the 1/2" B.S.P. nipple in the wall using approved thread seal, in the downward angled position as detailed in **Fig. 5**. Connect one end of flexible hose to cistern stop valve.
- 5- Flush the lines before connecting the flexible hose to the BE inlet valve and ensure the hose is not rubbing against the inside of the cistern.
Note: As specified in Australian Standard AS/NZS 3499, flexible hose assemblies shall not be submerged
- 6- Turn on water mains. Open Cistern Stop Valve and check for leaks and operation of mechanisms and valves. Ensure there is no leakage from the cistern into the pan.
- 7- Adjust water level to the water level mark inside the cistern by simply turning the float arm screw in a clockwise or anti-clockwise direction as detailed in **Fig. 6**.
- 8- Fit cistern lid to check flush button operation to complete installation.

Installation must be in accordance with AS/NZS 3500.1 and AS/NZS 3500.2



IMPORTANT

TO ACHIEVE A SATISFACTORY 4.5/3L FLUSH PERFORMANCE AND A 4 STAR WATER EFFICIENCY RATING THE CISTERN MUST BE MATCHED WITH A COMPATIBLE CAROMA SMARTFLUSH 4.5/3L TOILET PAN.