

Caroma®

Sahara II

**Vitreous China 4.5/3 litre Dual Flush
Wall Faced Close-Coupled Toilet Suite**

Revision: 1.0
Date: June 2017

Supersedes all previous issues

3.26.1



Caroma®

Sahara II

Vitreous China 4.5/3 litre Dual Flush
Wall Faced Close-Coupled Toilet Suite



A softened geometric designed wall faced toilet suite conceals plumbing fittings for a clean and modern look. The pan connection system includes the patented Caroma Uni-Orbital® Connector for increased installation flexibility. The Caroma Uni-Orbital® Connector extends to any position in a 50mm radius, unlike traditional connectors that only move backwards and forwards. The setout range is from 60mm – 195mm with a recommended setout of 140mm.

Pan: **Sahara II** 4.5 litre full flush washdown pan with box rim.

Traps: Universal trap for S or P-trap installations.

Cisterns: **Sahara II** cistern – has a free fitting lid and is suitable for domestic and light commercial applications. Available as internal overflow. Standard bottom inlet with optional back entry conversion kit.

Important: Working pressure minimum 30kPa to maximum 1000kPa flow pressure. Rain water tank compliant. For back entry installation, accurate wall setout for B.S.P. 1/2" Nipple water inlet connection is essential.



Fixing: The cistern is fixed directly to the pan with a robust concealed base fixing system without the need for wall fixing.

Seats: The **Sahara** soft close seat is provided as standard with the Sahara suite. The seat features a easy quick release mechanism that allows for cleaning. A quality solid section compression moulded toilet seat, fitted with buffers and metal hinges.


Colours: White only.

Installation: The installation of the toilet suite shall be in accordance with the normal minimum drainline grade requirements in AS/NZS 3500.2.

Dimensions: All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

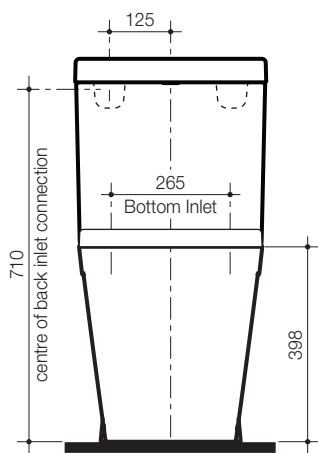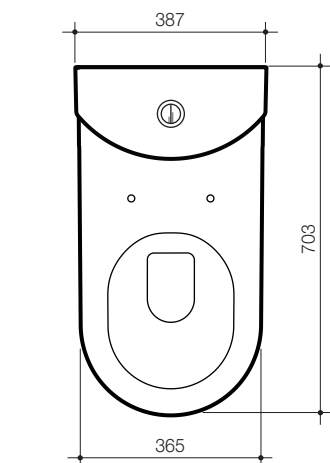

140 recommended range 60 – 195mm
(up to 35mm sideways adjustment)

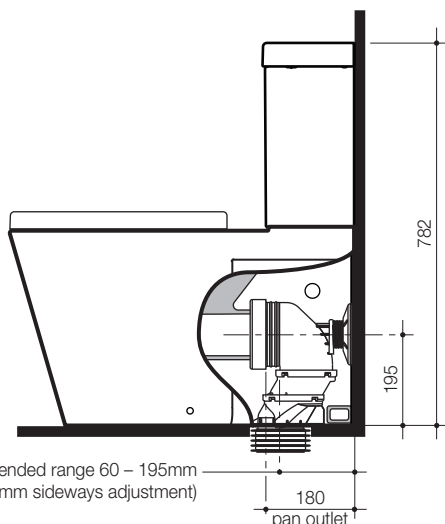


Sahara II Wall Faced Close Coupled Toilet Suite with Soft Close Seat

Code No.

4.5/3 litre Bottom Inlet with
Back Entry Conversion Kit,
Uni-Orbital® Connector
and Internal Overflow

987215W

D82 Concealed Fixing Bracket



Note: All height dimensions to underside of pan, make allowance for bedding when installing.

Bedding: The pan should be fixed to the floor with a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast drying cement in the bedding mixture. When bedded the back of the foot of the pan should be approximately 10mm above the finished floor.

Bracket fixing: The pan should be bedded with an acetic cured silicone sealant and fixed with the D82 Fixing Brackets supplied.