

BOOSTER – BASIN SET

WATER EFFICIENT TAPWARE
(NOMINAL FLOW RATE = 5 L/min)


PLUMBERS INSTALLATION INSTRUCTIONS

Important Information

- * Not suitable for gravity feed systems.
- * Fixed basin outlet is fitted with a 5 L/min flow regulated aerator insert.
This low flow rate may not be suitable for connection to some Instantaneous Gas Water Heaters, some Tempering Valves, some Solar Water Heaters & some Thermostatic Mixing Valves.
Check with the manufacturers of these products.
Note: – An 8 L/min aerator insert kit (Part No. 20742), is available if required.
- * Isolating stop taps are recommended to be fitted to the inlet connections. (Part No: 842018C – Mini cistern 1/4 T)
- * All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.
Note: Aerator insert housing must be retightened to prevent removal by hand.

Installation

- 1) Measure centre distance between tap body holes in deck, cut breech piece (13) to required length. (As a guide see cutting template below)
- 2) Install basin outlet (17) together with seal (16), fit washer (15) and backnut (14) and tighten.
- 3) Fit compression nuts (12) and olives (11) to each end of breech piece (13), connect to tap bodies (10) and tighten compression nuts (12) slightly.
- 4) Fit one locknut (8) and one washer (9) to each tap body (10). Install assembly into deck ensuring 'O' rings on breech piece (13) are not damaged as they enter tail of basin outlet (17). Fit remaining washer (9) and locknut (8), adjust locknuts (8) so that the tap bodies (10) protrude 5mm above the deck and tighten.
- 5) Tighten compression nuts (12) on the breech piece (13).

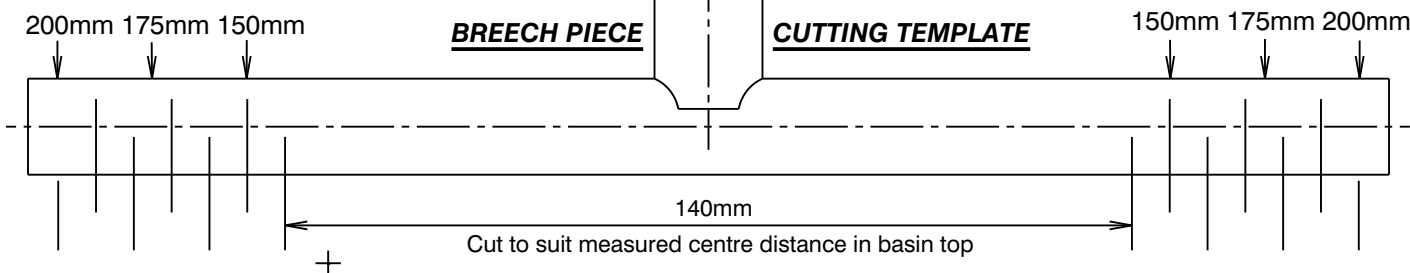

IMPORTANT

Pressure & Temperature Requirements.

- Hot and cold water inlet pressures should be equal.
- Inlet pressure range : 150 – 1000 kPa
New Regulation : – 500 kPa maximum operating pressure at any outlet within a building.
(Ref. AS/NZS 3500.1 – 2003, Clause 3.3.4)
- Maximum hot water temperature : 80°C.

Deck Requirements

- Centre distance between tap body holes : 120 – 210mm
- Deck thickness : 25mm maximum
- Tap body holes (in deck) : Ø34 – 36mm
- Tap outlet hole (in deck) : Ø22 – 30mm

* Flora handle shown.

- 6) With jumper valve and fibre washer in position as shown, screw tap head assembly (7) into tap body (10) and tighten.


- 7) Screw on flanges (6) to each tap head (7) and tighten securely, taking care not to damage the decorative finish.

- 8) Fit handle assembly as follows: –
FLORA/ NEW DIAMOND HANDLES

- i) Ensure handle insert (5) is in position in handle (4)*. Fit handle (4)* onto spindle and push firmly down until it bottoms internally.
- ii) Screw nut (3) onto spindle and tighten using a flat bladed screwdriver.
- iii) Press indicator ring (2) fully into handle (4)*.
(RED = Hot handle, BLUE = Cold handle).
Push cap (1) firmly into indicator ring (2).

BOOSTER HANDLES

- i) Fit handle (18) directly onto spindle
- ii) Screw on button (19) to spindle and tighten firmly against handle (18), taking care not to damage the decorative finish.

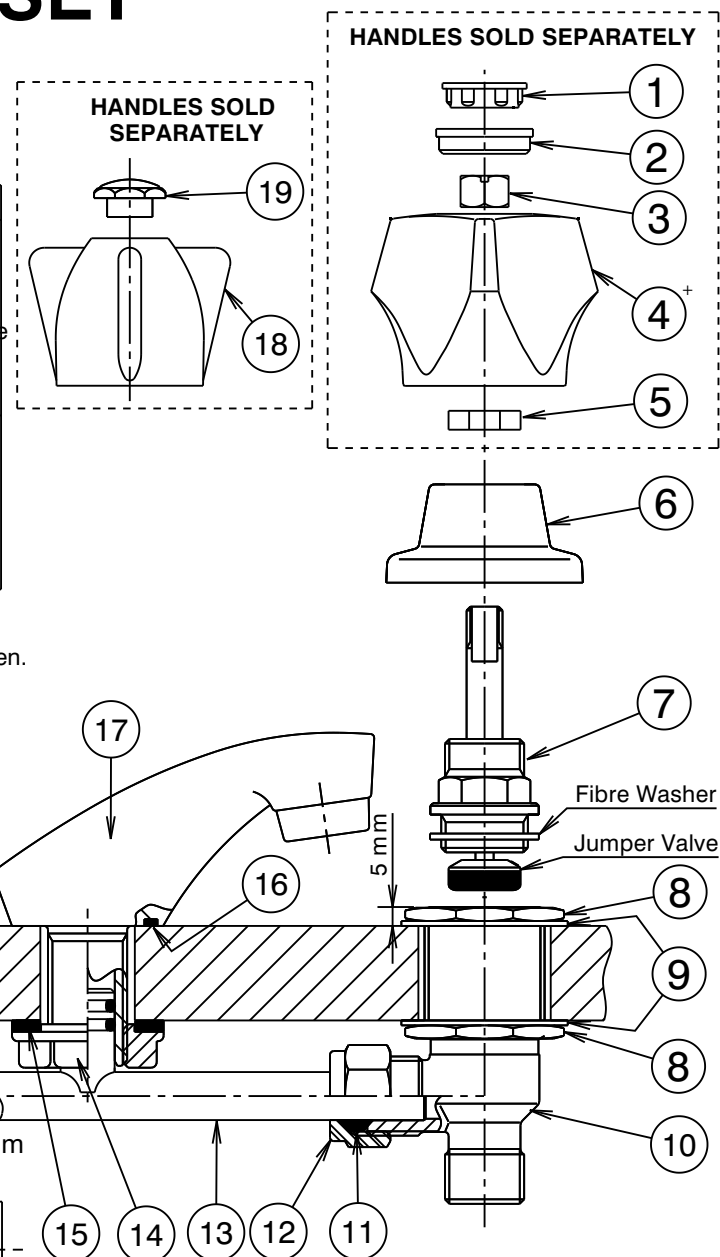

Distributed by:
Dorf Clark Industries Limited
ABN 23 004 394 923

IS543B(10/07)