

Cosmo Sovereign Care

Sanitary Facilities - Access and Mobility 4.5/3 litre Dual Flush Toilet Suite



A contemporary designed 4.5/3 litre dual flush **Cosmo Sovereign Care** toilet suite installation designed to provide a raised seat height of 460mm for accessible applications. The pan features a concealed trap which facilitates easy cleaning. The versatility of the **Cosmo Care Pan Concealed Trap** makes it ideal for use by wheel-chair users including wheeled commode chairs.

Important:

Further reference must be made to NZS 4121.1 with current amendments to determine circulation space, grab rail and installation requirements. The dimensions in this sheet may change with amendments to the standard.

Pan: **Cosmo Care Pan Concealed Trap** pan 4.5 litre full flush washdown type.

Traps: S trap (WELS 4 star rated) or P trap (WELS 4 star rated). Unvented only.

Inlet: 50mm back inlet.

Cistern: **Sovereign 4 Star Cistern** (wall fix version).

Important: Working pressure minimum 30kPa to maximum 1000kPa flow pressure. Rain water tank compliant.

Buttons: Round Care Button - Metal (supplied).

Inlet Valve and Overflow: **Standard Bottom Entry Cistern** – available as right hand inlet which is interchangeable and incorporates the Apollo inlet valve. Internal overflow only.

Seats: **Caravelle Care** seat supplied, available in Caroma White (W), Sorrento Blue (SB) and Anthracite Grey (AG).

Position of the Pan: For wheel chair access, the installed pan must be 700 to 750mm from the front of the pan to the finished wall and provide a seat height of 460mm.

Position of the Cistern: The underside of the cistern must be 600mm minimum from the finished floor. The push button height should be no greater than 1100mm from the finished floor.

Colours: White only.

Installation: The installation of the toilet suite shall be in accordance with the normal minimum drainline grade requirements in AS/NZS 3500.2.


Dimensions: All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.



Note: The projection requirements detailed on this illustration are for wheel chair access only. All height dimensions to underside of pan, make allowance for mortar bedding.


Mortar bedding: The pan should be fixed to the floor with a sand cement mixture of 3:1 to a depth of 60mm. When bedded the back of the foot of the pan should be approximately 10mm above the finished floor.

Screw fixing: The pan should be bedded with an acetic cured silicone sealant and fixed with corrosion resistant screws and pan guard washers. Use Caroma pan fixing kit. Code No.601150.

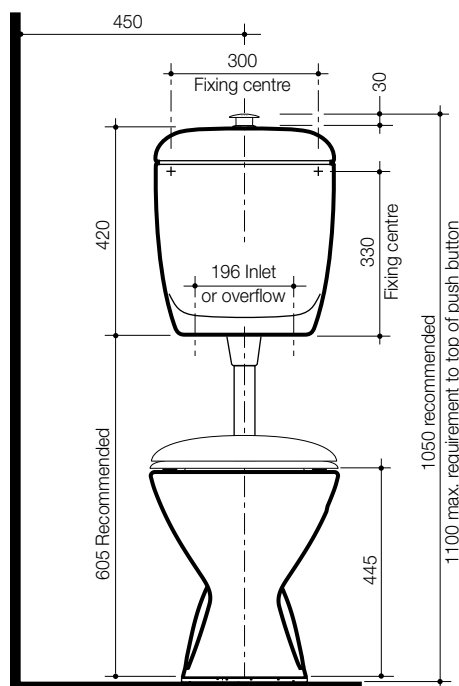

Cosmo Sovereign Care Toilet Suites:

	Code No.	Seat colour:
Caravelle Double Flap S trap	987916	W, SB or MG
P trap	987926	W, SB or MG

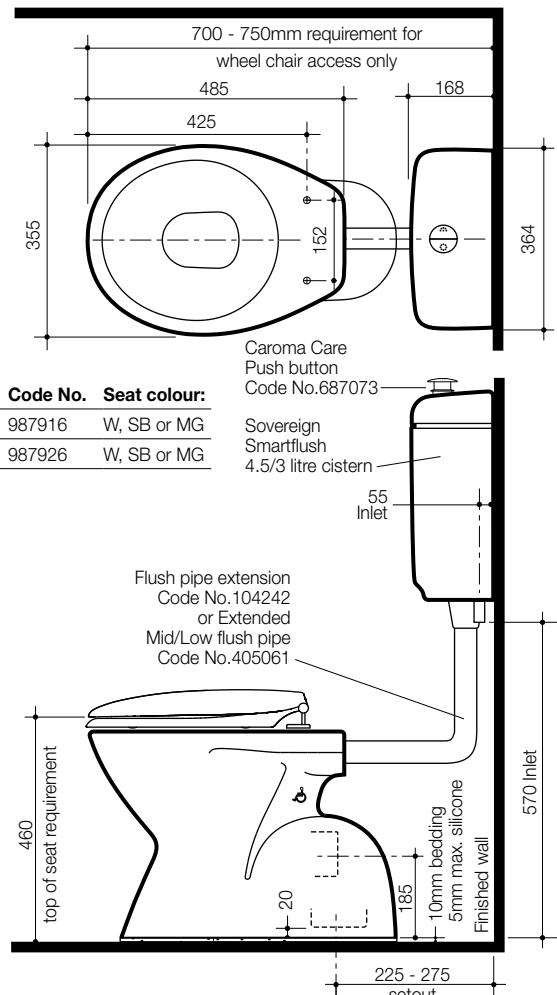

* Reference must be made to New Zealand Standard NZS 4121.1 to confirm installation



Suitable for installation to comply to New Zealand Standard NZS 4121.1 Design for access and mobility