CAROMA

UNIVERSAL HOB MOUNTED SOAP DISPENSER RISER 60mm

INSTALLATION INSTRUCTIONS

- 1) Check that you have selected the correct riser kit, to match the decorative finish on the soap dispenser
- 2) Unscrew the clamp ring (6), slide the metal washer (5), flat seal (4) and base ring (2) out over the mixing valve (8), clip (13), sensor cable(12) and put them aside. Remove clip (13) and disconnect the mixing valve (8) from tube (14). Then by using slight force by hand, unscrew the threaded tube (3) and put it aside. A spanner can be used on the flats of threaded tube (3) to unscrew if required.
- 3) Take the riser (9) out of the box, orientate it by keeping the male threaded end at the top as shown in **Fig. 2**, pass it over the sensor cable (12) firstly then over the tube (14). Then while taking care of the decorative finish, fit the male threaded end under the soap dispenser body (1), screw it in and hand tighten firmly.
- 4) Screw the larger thread end of threaded tube (3) in the underside of riser (9) until it bottoms and hand tighten. Push the handles on the clip (13) inwards and pass it over the tube (14), then insert the spigot of mixing valve (8) into the tube (14) then while pressing the handles slide the clip (13) over the spigot, as shown in **Fig. 1**.
- 5)Pass the base ring (2) over the tubes (10 & 11), sensor cable (12) then over threaded tube (3) until the shoulder of base ring (2) bottoms in the underside of riser (9). Insert tubes (10 & 11) and sensor cable (12) through the hole in the deck. Insert threaded tube (3) into deck hole, orientate soap outlet as required. From under the deck, Insert tubes (10 & 11), mixing valve (8) and sensor cable (12) through flat seal (4), washer (5) and clamp ring (6) in order, then fit flat seal (4) followed by washer (5) over threaded tube (3) as shown in Fig. 2. Screw clamp ring (6) onto threaded tube (3) until it contacts washer (5) & the flat seal (4) has contacted the underside of the deck. Tighten two screws (7) equally until soap outlet is clamped firmly to the deck. DO NOT OVERTIGHTEN.

Installation instructions supplied with the hob soap dispensers must be followed to complete the rest of the installation.

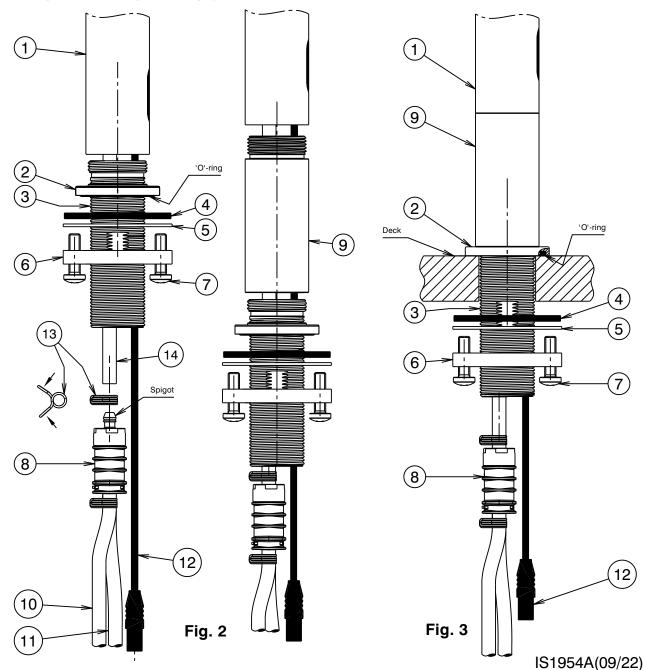


Fig. 1